

Rolls

FLOODED DEEP CYCLE BATTERIES

2 YS 62P

2 VOLTS



CONTAINER: (INNER)	Polypropylene	WEIGHT DRY:	181 kg	400 Lbs.
COVER: (INNER)	Polypropylene - heat sealed to inner container	WEIGHT WET:	259 kg	570 Lbs.
CONTAINER: (OUTER)	High Density Polyethylene	LENGTH:	695 mm	27 3/8 Inches
COVER: (OUTER)	High Density Polyethylene snap fit to outer container	WIDTH:	229 mm	9 Inches
TERMINALS:	Flag with stainless steel nuts & bolts	HEIGHT:	803 mm	31 5/8 Inches
HANDLES:	Molded			

PLATE HEIGHT:	600 mm	23.625 Inches
PLATE WIDTH:	143 mm	5.625 Inches
THICKNESS (POSITIVE):	6.99 mm	0.275 Inches
THICKNESS (NEGATIVE):	4.57 mm	0.180 Inches
POSITIVE PLATE DOUBLE WRAPPED WITH SLYVER ENVELOPED WITH HEAVY DUTY SEPARATOR		

COLD CRANK AMPS (CCA):	0°F / -17.8°C	11480
MARINE CRANK AMPS (MCA):	32°F / 0°C	14350
RESERVE CAPACITY (RC @ 25A):		16386 Minutes


CAPACITY **4860 AH**

HOURLY RATE:	SPECIFIC GRAVITY	CAPACITY / AMP HOUR	CURRENT / AMPS
@ 100 HOUR RATE	1.280	6853	68.53
@ 72 HOUR RATE	1.280	6464	89.78
@ 50 HOUR RATE	1.280	5978	119.56
@ 24 HOUR RATE	1.280	5054	210.60
@ 20 HOUR RATE	1.280	4860	243.00
@ 15 HOUR RATE	1.280	4520	301.32
@ 12 HOUR RATE	1.280	4228	352.35
@ 10 HOUR RATE	1.280	4034	403.38
@ 8 HOUR RATE	1.280	3791	473.85
@ 6 HOUR RATE	1.280	3451	575.10
@ 5 HOUR RATE	1.280	3256	651.24
@ 4 HOUR RATE	1.280	3013	753.30
@ 3 HOUR RATE	1.280	2722	907.20
@ 2 HOUR RATE	1.280	2333	1166.40
@ 1 HOUR RATE	1.280	1652	1652.40




CELLS:	31 Plates/Cell	2 Cells
SEPARATOR THICKNESS:	3 mm	0.105 Inches
GLASS MAT INSULATION:	1 mm	0.022 Inches
ELECTROLYTE RESERVE: ABOVE PLATES	95 mm	3.75 Inches

CYCLE LIFE VS. DEPTH OF DISCHARGE

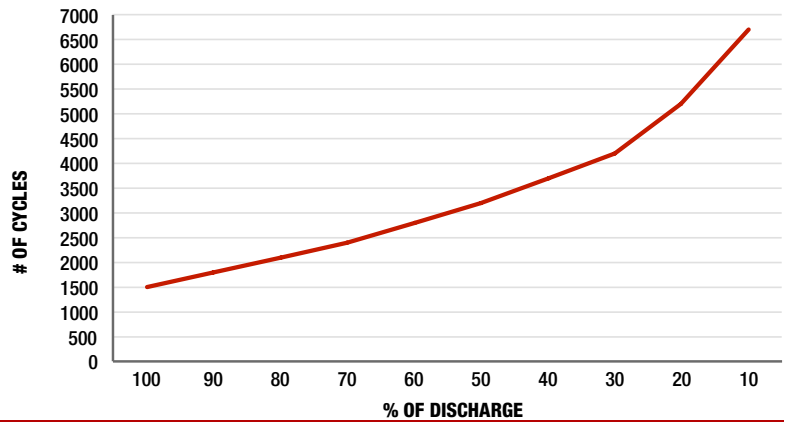

VOLTAGE VS. DEPTH OF DISCHARGE

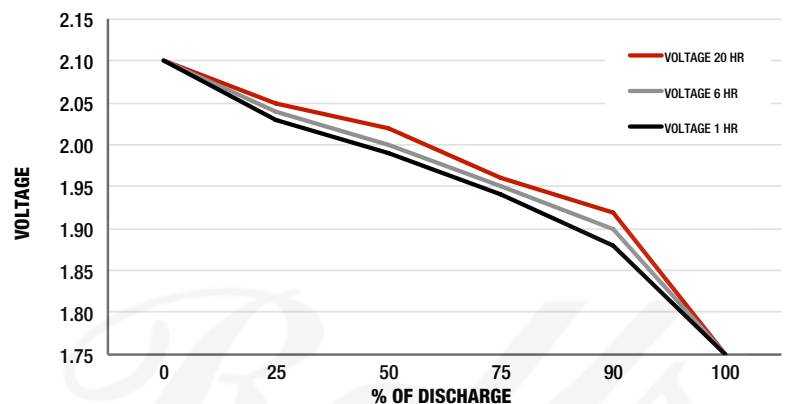

Amphere Hour capacity ratings based on specific gravities of 1.280. Reduce capacities 5% for 1.265 specific gravity and 10% for specific gravities of 1.250