

## Safety

- Cylindrical LiFePO<sub>4</sub> cells (UL1642)
- IEC62133 (cell), IEC62619(cell), UN38.3 (cell/pack)
- ROHS (cell), CE system certification, IP65 Rating

## Design

- Standard-size (BCI) ABS container for easy VRLA replacement
- Fast charge/discharge performance
- Maintenance-free operation

## Battery Management System (BMS)


- Integrated hardware BMS inside
- Independent charge & discharge protection
- Short-Circuit Protection, Over-Voltage Protection, Low-Voltage Protection, Over-Current Protection, Low-Temperature Protection, Over-Temperature Protection

# R12-300LFP

## LiFePO<sub>4</sub> BATTERY



Rolls high performance LiFePO<sub>4</sub> batteries offer exceptional cycle life and are up to 50% lighter than equivalent lead-acid models..

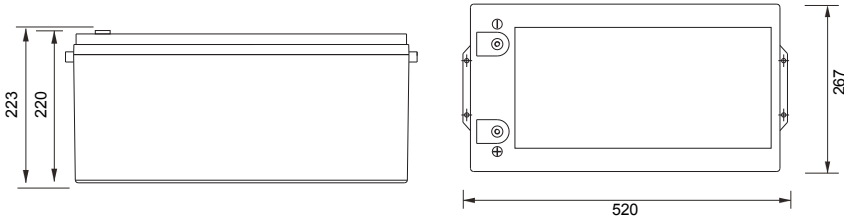

## SPECIFICATIONS R12-300LFP

PRODUCT DIMENSIONS: (LxWxH incl terminal)	521mm (20.5") x 267mm (10.51") x 223mm (8.78")	
PRODUCT WEIGHT:	33 Kg / 72.8 Lbs	
NOMINAL VOLTAGE: (V)	12.8V	
NOMINAL CAPACITY: (AH)	300 AH	
TOTAL ENERGY: (KWh)	3.84 KWh	
RECOMMENDED END OF DISCHARGE VOLTAGE: (V)	12.0V	
END OF DISCHARGE PROTECTION VOLTAGE: (V)	10.0V	
INTERNAL BMS MODEL:	4S200A	
TERMINAL:	F 12 (M8)	
CYCLE LIFE:	>6000 @ 80% DOD, >3000 @ 100% DOD	
SERIES CONNECTION:	4 UNITS MAX	
PARALLEL CONNECTION:	4 UNITS MAX	

## CHARGING


CHARGE VOLTAGE RANGE: (V)	14.0 - 14.6V	*DO NOT USE TEMPERATURE COMPENSATION (BTS)
RECOMMENDED CHARGE VOLTAGE: (V)	14.4V	
RECOMMENDED CHARGE CURRENT: (AMPS)		
0~5°C (32-41°F)	≤0.1C	30 A
5~10°C (41-50°F)	≤0.2C	60 A
10~35°C (50-95°F)	≤0.5C	150 A
35~50°C (95-122°F)	≤0.2C	60 A
CHARGE MODE:	CHARGE AT RECOMMENDED VOLTAGE & CURRENT BY TEMPERATURE UNTIL CHARGE CURRENT DROPS TO ≤ 0.05C (CC,CV)	
<b>MAX CONTINUOUS CHARGE CURRENT: (AMPS)</b>	<b>150 A</b>	
<b>MAX CONTINUOUS DISCHARGE CURRENT: (AMPS)</b>	<b>200 A</b>	
SURGE CURRENT LIMIT: (AMPS)	800 A (300ms)	
CHARGE TEMPERATURE RANGE:	0°C~55°C (32~131°F)	
DISCHARGE TEMPERATURE RANGE:	-20°~60°C (-4~140°F)	
STORAGE TEMPERATURE RANGE:	-5°~45°C (23~113°F)	




## R12-300LFP

LiFePO<sub>4</sub> BATTERY


### CHARGING CHARACTERISTICS - (0.5C @ 25°C)

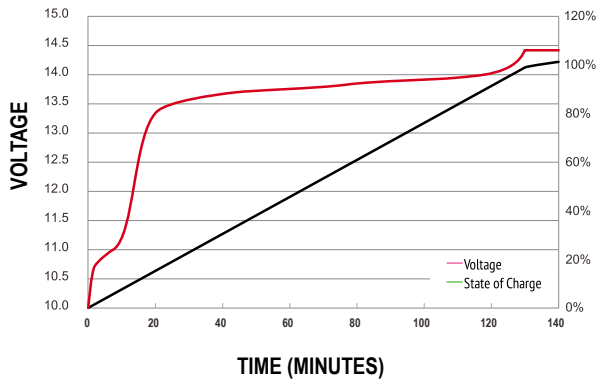


### DISCHARGE CHARACTERISTICS ( @ 25°C)

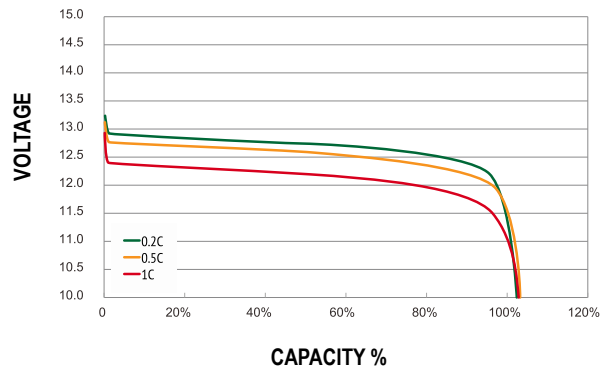


### TEMPERATURE VS CAPACITY

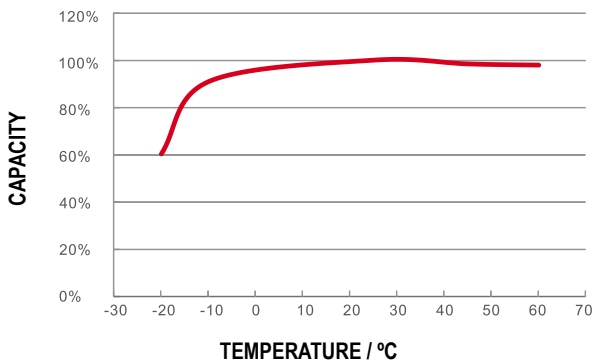

### CHARGE TIME 0.2C / 0.5C @ 25°C

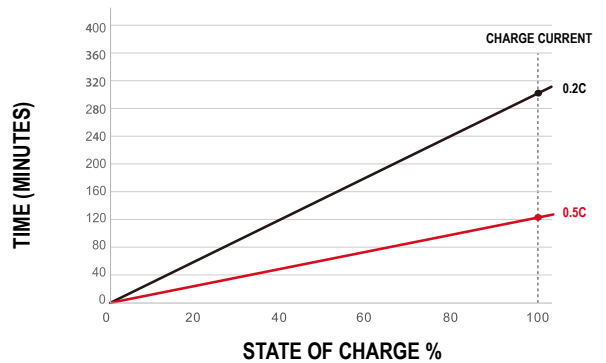

### SELF-DISCHARGE BY TEMPERATURE

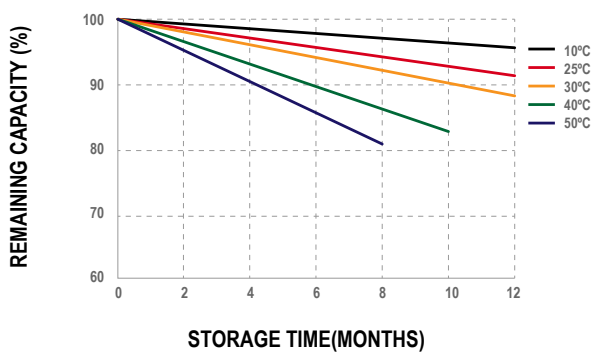

### CYCLE LIFE VS DEPTH OF DISCHARGE @ 25°C

