





NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00285 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REMOVED SIDE HOLD-DOWNS	6/10/03	JBT

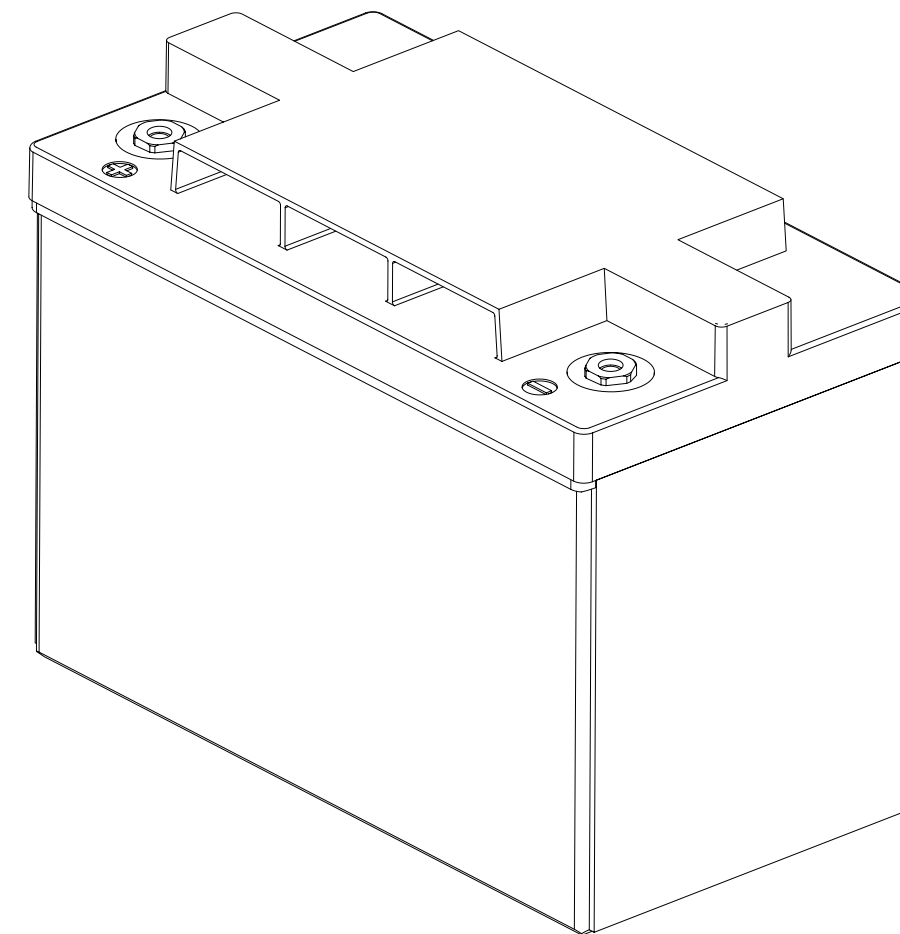

REFERENCE VIEW

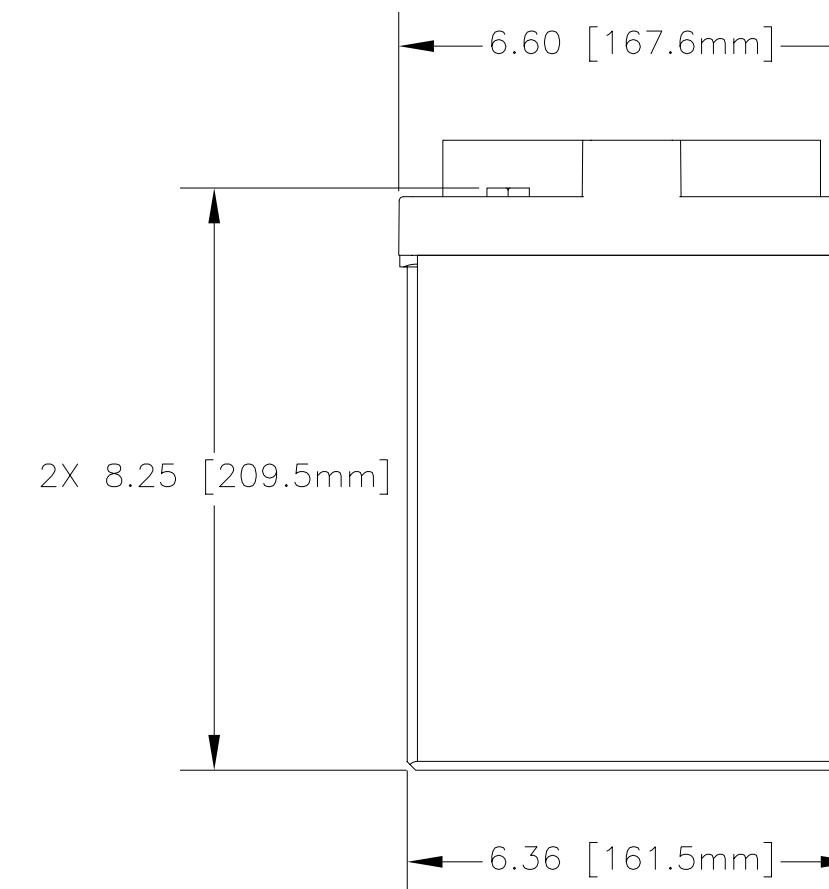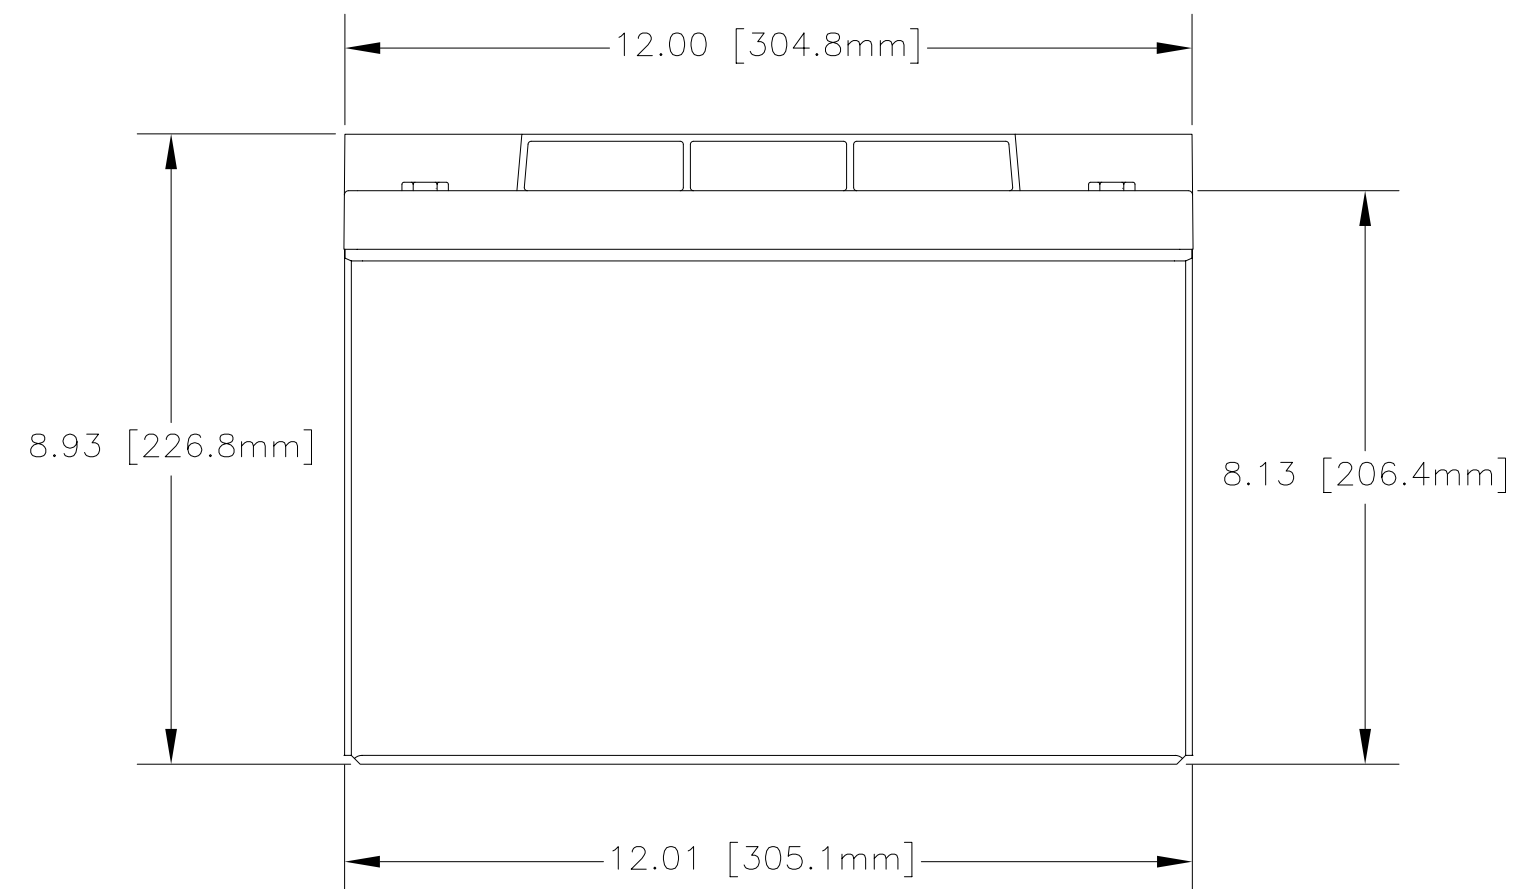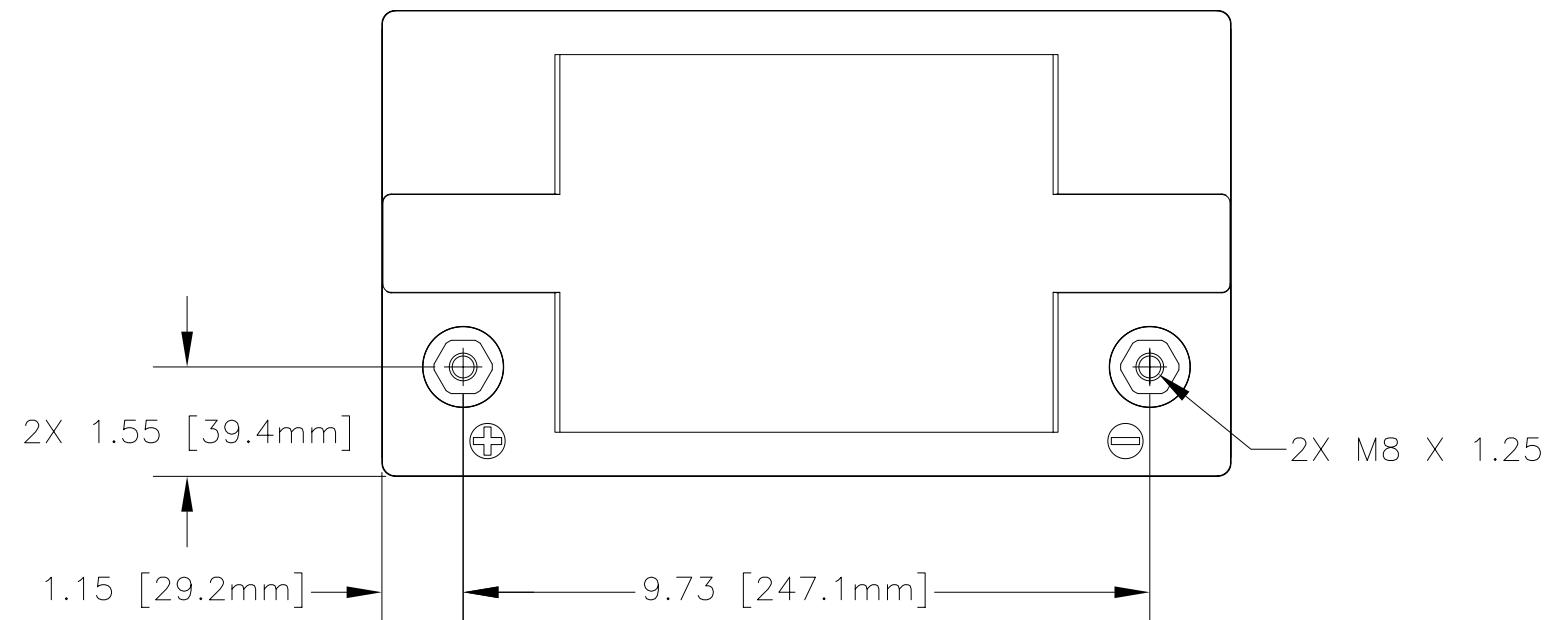

CAPACITY RATINGS	
PART NUMBER	PVX-1040T
NOMINAL WEIGHT	66 LBS [30 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	104 AH

ENVELOPE DRAWING

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CONTRACT NO. NA		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790	
FRACTIONS ± 1/32	DECIMALS .XX ± .06	ANGLES ± 1'	APPROVALS	DATE	TITLE
.XXX ± .030			DRAWN ELH	8/13/01	BATTERY, SLA, 12 VOLT, PVX-1040T
TREATMENT NONE	CHECKED HRF	APPROVED JBT	ISSUED AT	6/13/03	SIZE C
FINISH NONE	ACT WT NA	CALC WT NA			CAGE CODE 63017
SIMILAR TO NA					DWG NO. PVX-1040T
					REV A
					SCALE NONE
					SHEET 1 OF 1

ENGINEERING COPY 13JUN03