



NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00294 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REDESIGNED CASE AND COVER	1/22/03	JBT
B	UPDATED HANDLES, ADDED 2X ϕ .325 DIM	5/13/08	JBT

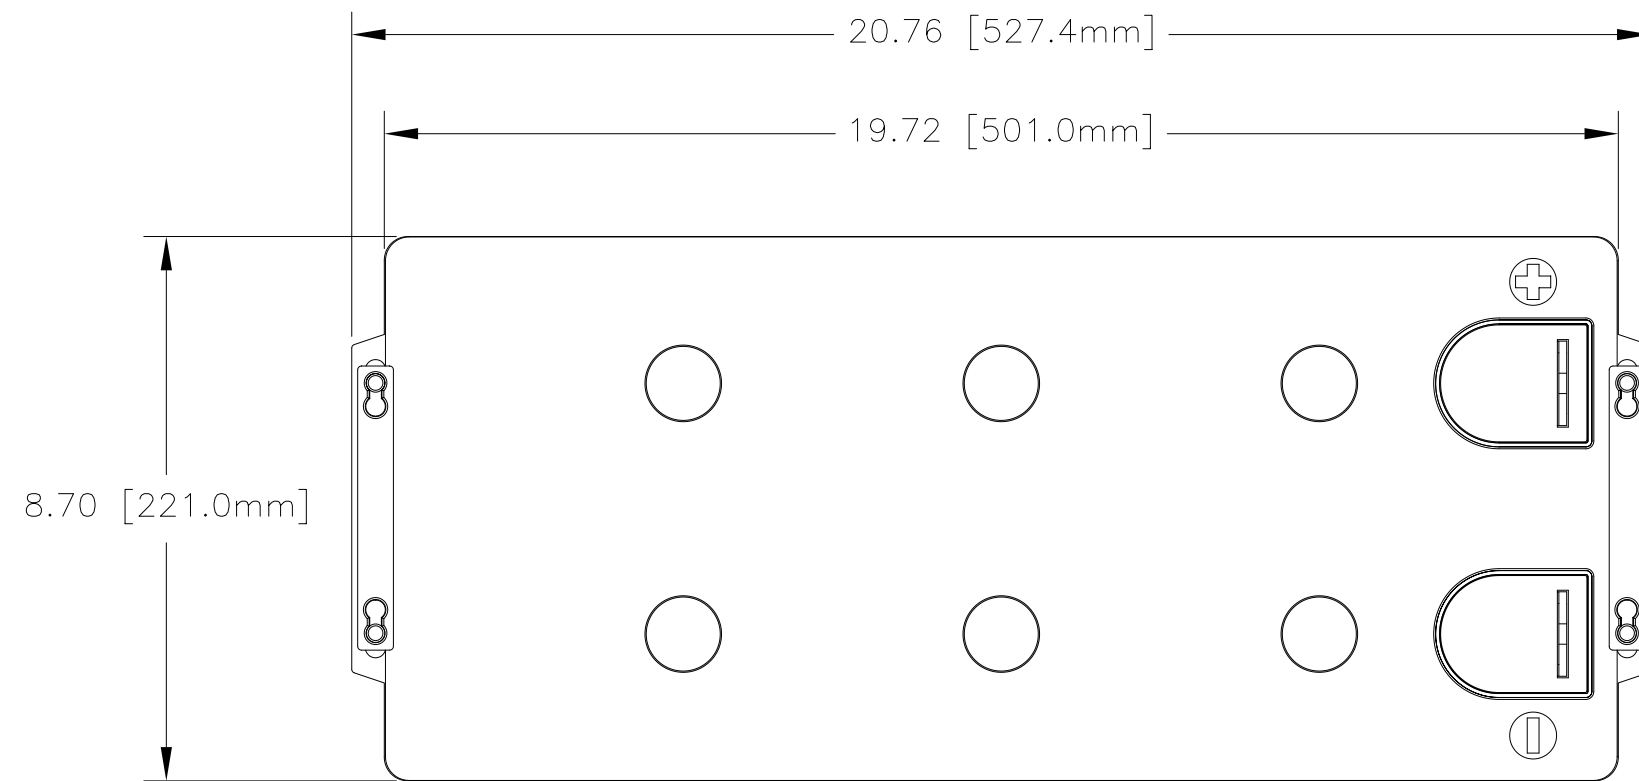

PVX-2120 TERMINAL OPTION

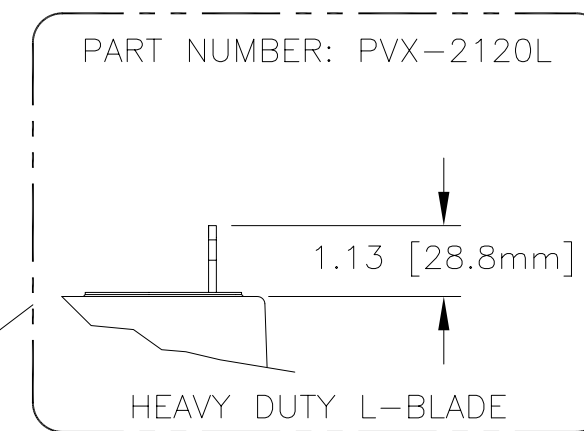

NOTE: SEE OPTION LISTED

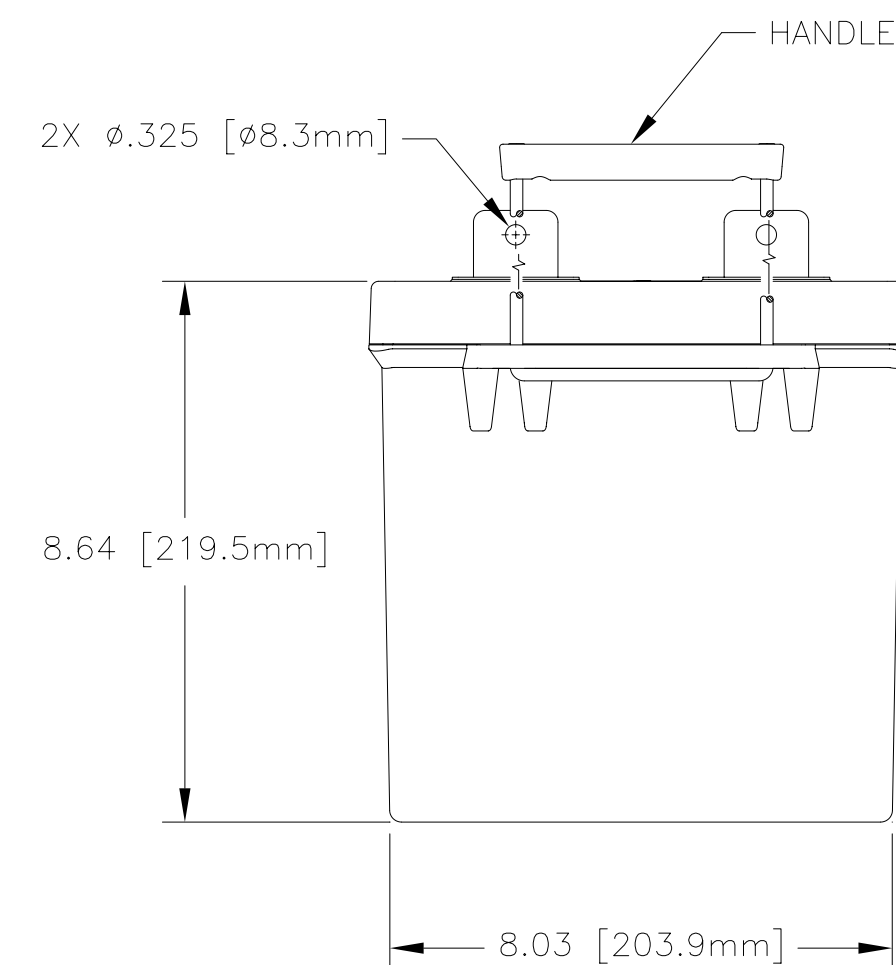

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-2120
NOMINAL WEIGHT	138 LBS[62.7 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	212 AH

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
FRACTIONS DECIMALS ANGLES		CONTRACT NO.		TITLE	
$\pm 1/32$.XX $\pm .06$ $\pm 1^\circ$		NA		BATTERY, SLA, 12 VOLT, PVX-2120	
.XXX $\pm .030$		APPROVALS DATE		SIZE CAGE CODE DWG NO. REV	
TREATMENT NONE		DRAWN ELH 8/13/01		C 63017 PVX-2120 B	
FINISH NONE		CHECKED HRF 8/21/01		SCALE NONE SHEET 1 OF 1	
SIMILAR TO NA		APPROVED JBT 8/23/01			
ACT WT NA		ISSUED NS 5/14/08			
CALC WT NA					