



NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00295 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
D	UPDATED HANDLES	10/7/09	DV

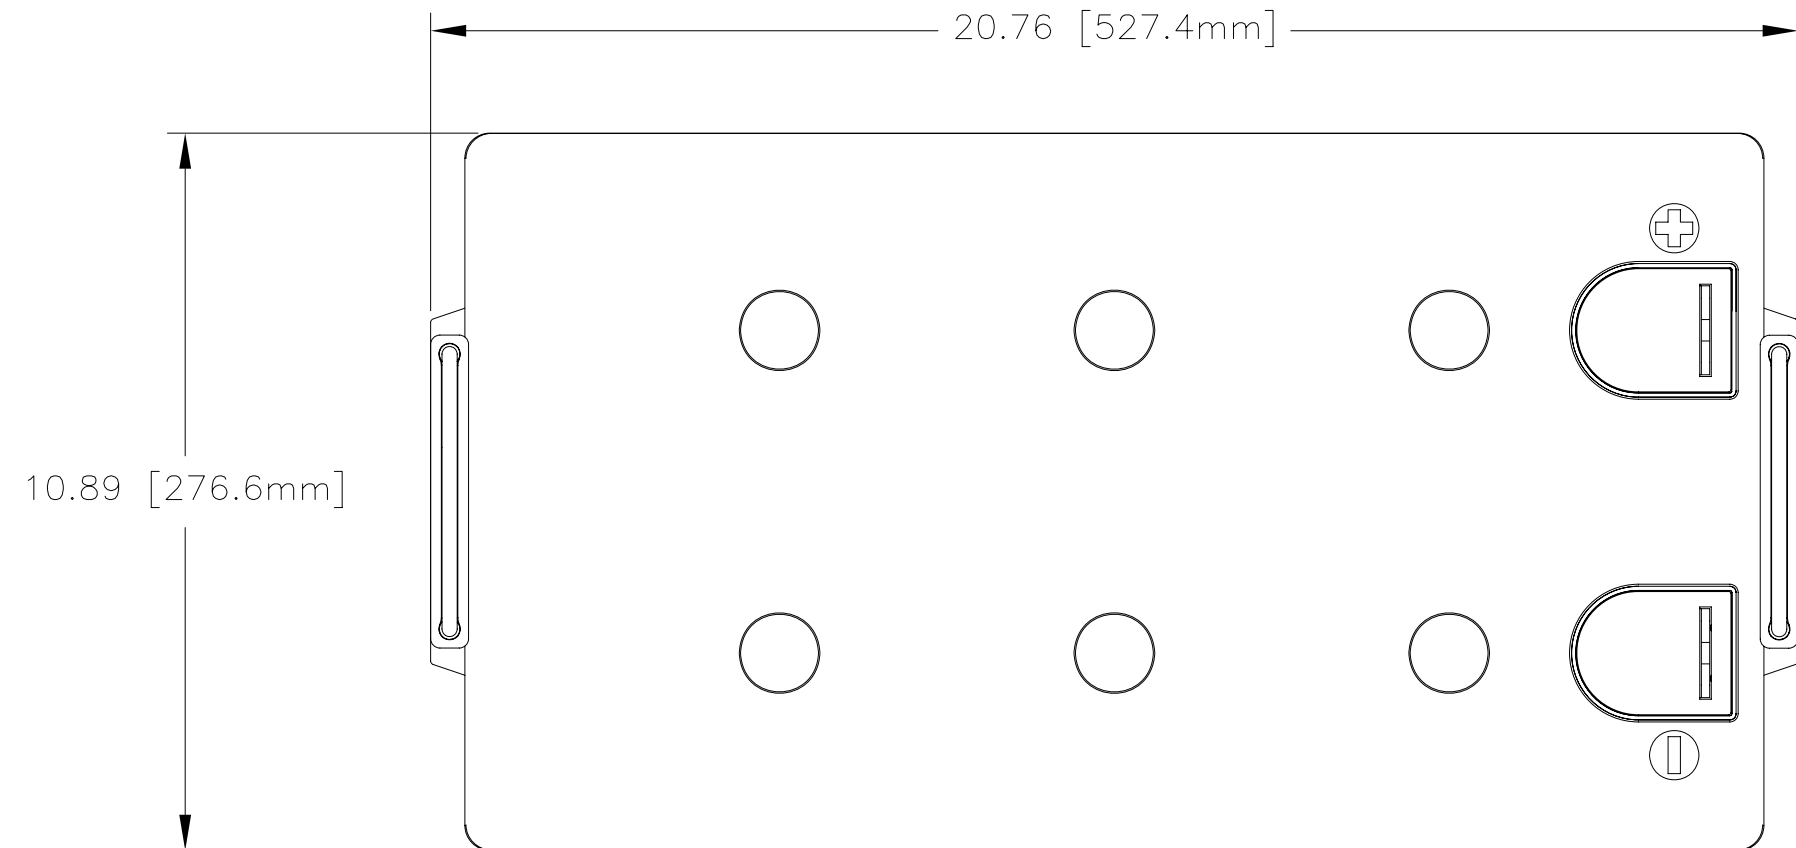

PVX-2580 TERMINAL OPTION

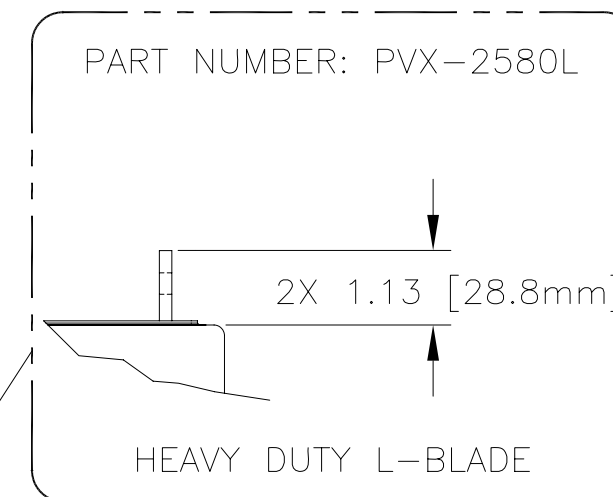

NOTE: SEE OPTION LISTED

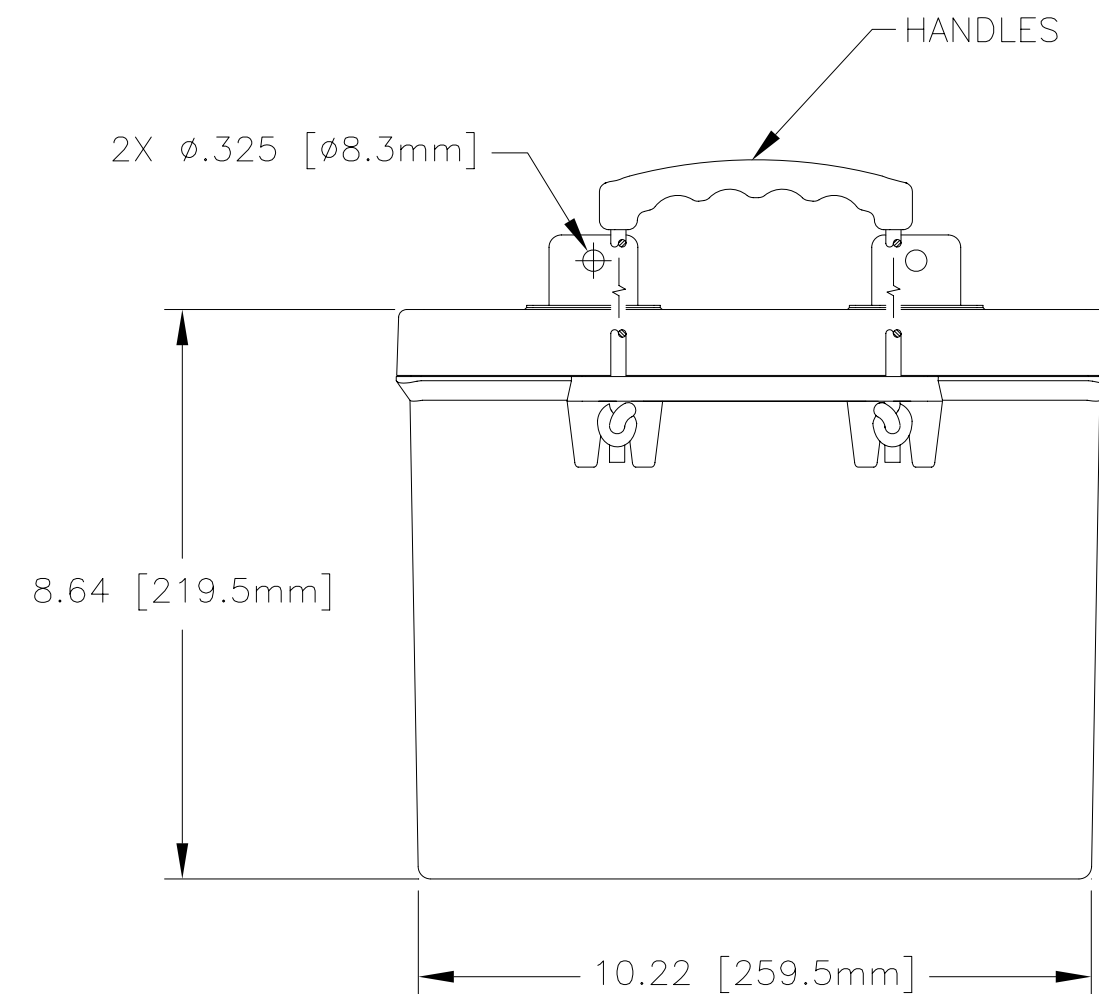

CAPACITY RATINGS	
PART NUMBER	PVX-2580
NOMINAL WEIGHT	165 LBS[75 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	258 AH

ENVELOPE DRAWING

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CONTRACT NO. NA		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790	
FRACTIONS	DECIMALS	ANGLES	APPROVALS	DATE	TITLE
$\pm 1/32$.XX $\pm .06$	$\pm 1^\circ$	DRAWN ELH	8/13/01	BATTERY, SLA, 12 VOLT, PVX-2580
	.XXX $\pm .030$		CHECKED HRF	8/21/01	SIZE CAGE CODE C 63017
TREATMENT	NONE	APPROVED	JBT	8/23/01	DWG NO. PVX-2580
FINISH	NONE	ISSUED	JJ	10/22/09	REV D
SIMILAR TO NA	ACT WT NA	CALC WT NA			SCALE NONE
				SHEET 1 OF 1	