



Series	AGM-S	Warranty	See Warranty Terms
Volts	6	Design	GC2
Cells	3		
Terminal Type	F14(M8) and TP08 Adapter [+21mm]		
Included Hardware	M8 stainless bolts & washers & TP08 adapter		
Size & Thread	M8		

### Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current	45 A
Maximum Charge Current	65 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	1.3 mΩ

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	740
Reserve Capacity (RC @ 25A)	431 Minutes
Reserve Capacity (RC @ 75A)	113 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%


Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>245 AH</b>	<b>2.45 A</b>
@ 20 Hour Rate	<b>220 AH</b>	<b>11.0 A</b>
@ 10 Hour Rate	<b>205 AH</b>	<b>20.5 A</b>
@ 5 Hour Rate	<b>175 AH</b>	<b>35.0 A</b>

Cut Off Voltage	Constant Current Discharge						
	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
1.75 VPC	120.6	72.7	52.2	41.5	34.9	24.8	21.1


### Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	29 kg	64 lbs
	Length	260 mm	10.24"
	Width	180 mm	7.09"
	Height Incl. Term.	250 mm	9.84"
Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.			
Container	ABS		
Cover	ABS		
Handles	Nylon Strap		

### Cycle Life vs. Depth of Discharge

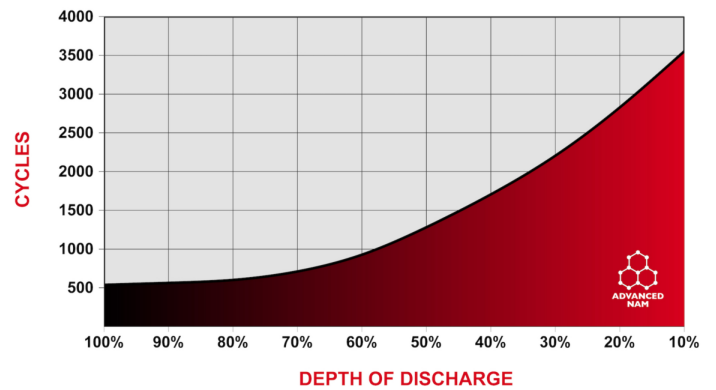

### Capacity vs. Temperature

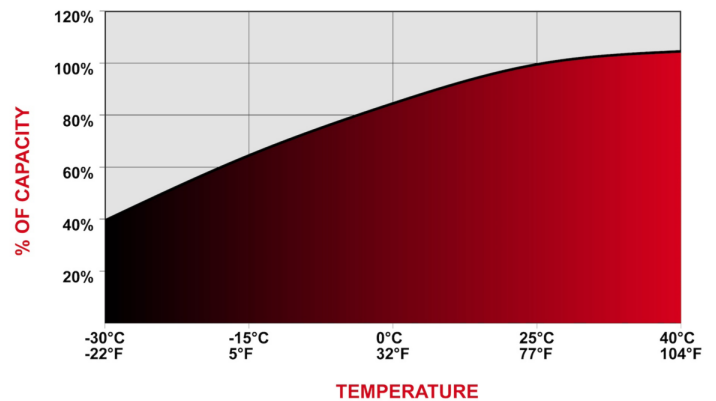

**bc** BATTERY COUNCIL INTERNATIONAL  
 Designed in compliance with applicable BCI, DIN, BS & IEC standards.  
 Tested in compliance to BCI & IEC standards.

